


Options for

# DINO lightweight

Mobile Elevating Work Platforms

**DINO Self propelled MEWPs /  
DINO Lightweight 4x4**

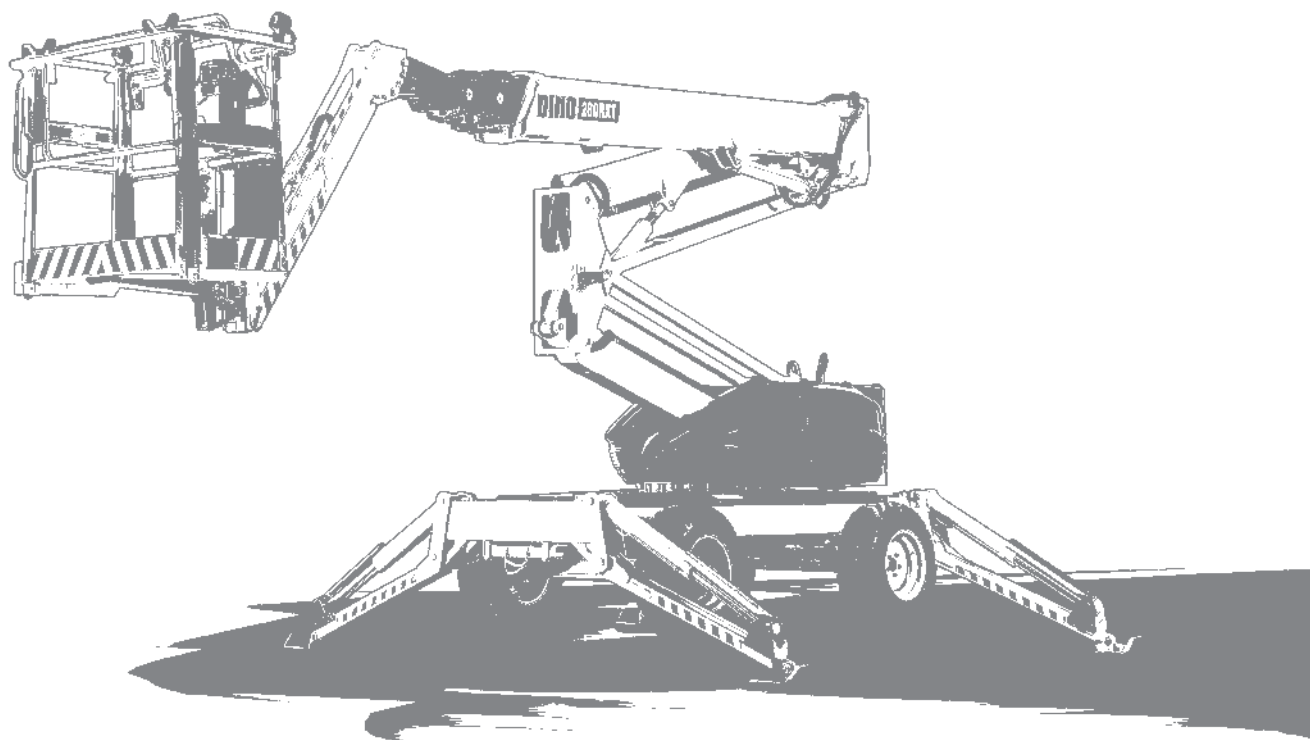

Valid for deliveries 1.1.-31.12.2022

**DINO** *RXT Series*

**DINOlift**  
UP TO THE JOB

## STANDARD EQUIPMENT

STANDARD EQUIPMENT	220RXT	280RXT
Continuous rotation of the boom	std	std
Basket rotation	std 180°	std 180°
AC socket in the basket x 2	std	std
Proportional controls	std	std
Oscillating axle	std	std
Automatic chassis levelling	std	std
Four wheel drive	std	std
Turf tires	std	std
Arctic kit (block heater, start battery charger)	std	std
USB power outlet in basket	std	std
Air / water line to the basket (max 200bar, 93°C)	std	std

## OPTIONS

### OPTIONS FOR ENHANCED USE

#### Rough terrain traction tires instead of / in addition to standard tires

- Voimakaskuvioinen maastorengas vakioorenkaan tilalle / lisäksi
- Alternativ terrängdäck istället för / utöver standarddäck
- Haftreifen für unwegsames Gelände statt / zusätzlich zu den Standard Reifen

220RXT	280RXT
Instead of std tires	
available	available
In addition to std tires incl. wheels	
available	available



#### Trelleborg AW305 special wide turf tires instead of / in addition to std tires

- Trelleborg AW305 erikoisleveät nurmikorenkaat vakioorenkaiden sijaan / lisäksi
- Trelleborg AW305 speciell gräsdäck istället för / utöver standarddäck
- Trelleborg AW305 speziell breite Rasen Reifen statt / zusätzlich zu den Standard Reifen

220RXT	280RXT
Instead of std tires	
available	available
In addition to std tires incl. wheels	
available	available



## Hydraulic generator 3.5 kW

- Hydrauligeneraattori 3,5 kW
- Hydraulisk generator 3,5 kW
- Hydraulische Stromerzeuger 3,5 kW

220RXT	280RXT
available	available



## Electric motor 230 VAC for boom movements only\*

- Sähkömoottori 230 VAC puomiston liikkeisiin\*
- Elmotor 230 VAC för bomrörelser\*
- Elektromotor 230 VAC für Auslegerbewegungen\*

\* Note! Electrical operation for boom movements only, not for driving or outriggers

220RXT	280RXT
available	available



## Air compressor 400 l / 12 bar

- Paineilmakompressori 400 l / 12 bar
- Luftkompressor 400 l / 12 bar
- Druckluftkompressor 400 l / 12 bar

220RXT	280RXT
available	available



## OPTIONS FOR ENHANCED MATERIAL HANDLING

### DINO SkyRack – plate & tube rack max loading 100 kg, 3m<sup>2</sup>\*

- DINO SkyRack – levy- & putkiteline, maks. kuorma 100 kg, 3 m<sup>2</sup>
- DINO SkyRack – skivlyft & rörlyft, max. belastning 100 kg, 3 m<sup>2</sup>
- DINO SkyRack – Platten- & Rohrgestell, max. Belastung 100 kg, 3 m<sup>2</sup>

\* Available for std basket & XL-basket

220RXT	280RXT
available	available



**OPTIONS FOR BASKET**

**LED working lights**


- LED työvalot
- LED arbetsbelysning
- LED Arbeitslichter



220RXT	280RXT
available	available

**Rack for tools & accessories, removable**

- Työkaluteline, irrotettava
- Verktygsställning, avtagbar
- Gestell für Werkzeuge, abnehmbar

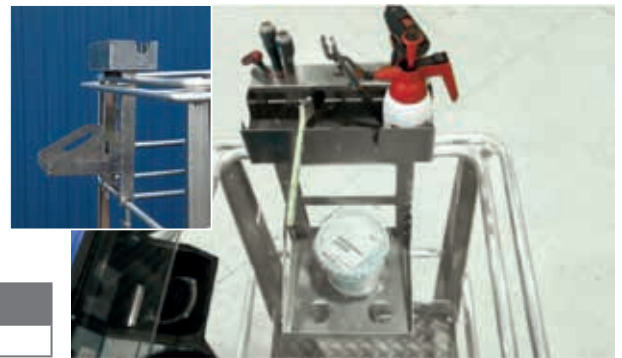

220RXT	280RXT
available	available

**12V power outlet in the basket**

- 12V-liitäntä korissa
- 12V-uttag i korgen
- 12V-Ausgang im Korb



220RXT	280RXT
available	available

**DINO Safe Guard, secondary guarding, including AV warning**

- DINO Safe Guard puristumisenestosuojaja AV-hälytyksellä
- DINO Safe Guard klämskydd med larmsignal
- DINO Safe Guard sekundäres Schutzsystem mit Alarmsignal



220RXT	280RXT
available	available

## Anemometer

- Tuulimittari
- Vindmätare
- Windmesser



220RXT	280RXT
available	available

## Basket load sensor

- Korikuormananturi
- Lastsensor på korgen
- Korblastsensor



220RXT	280RXT
available	available

## New! Entry stairs for the basket together with higher boom rest position

- Portaat koriin yhdessä korkeamman puomin tuen kanssa
- En stege till korgen gör att bommen kan vila i en högre position. Detta underlättar lastning av liften.
- Korb-Zugangsleiter in Verbindung mit höherer Ruheposition des Auslegers



220RXT	280RXT
available	available

## OPTIONAL BASKET CONFIGURATIONS

### One person basket (0.7 x 0.8 m) instead of / in addition to std basket

- Yhden hengen työkori (0,7 x 0,8 m) std korin sijasta / lisäksi
- 1-person korg (0,7 x 0,8 m) istället för / utöver std korg
- 1-Person Korb (0,7 x 0,8 m) statt dem / zusätzlich zum Std Korb



220RXT	280RXT
Instead of std basket	
available	available
In addition to std basket	
available	available

## XL-basket for two persons (0.75 x 1.6 m), SWL 250 kg, instead of std basket, incl. basket load sensor

- 2 hengen XL-kori (0,75 x 1,6 m), korikuorma 250 kg, std-korin sijasta, sis. korikuormananturin
- XL korg för två personer, (0,75 x 1,6 m), 250 kg korgkapacitet, inkl. lastsensor på korgen
- XL-Korb für zwei Personen, (0,75 x 1,6 m), 250 kg Korblast, inkl. Korblastsensor



220RXT	280RXT
available	-

## OTHER OPTIONS

### GPS Telematics device\*

- GPS seurantalaite\*
- GPS lokalisator\*
- GPS Lokalisierer\*

\* Contact us for alternatives



220RXT	280RXT
available	available

### Particle filter incl. by-pass valve

- Hiukkassuodatin ohitusventtiilillä
- Partikelfilter med by-pass ventil
- Partikelfilter inklusive Umgehungsventil



220RXT	280RXT
available	available

### Hydraulic oil cooler for hot environment

- Hydraulioiljyn jäädytyn kuumaan työskentely-ympäristöön
- Oljekylare för varm miljö
- Hydraulikölkühler für heiße Bedingungen

220RXT	280RXT
available	available

**Thermometer / temperature limiter**

- Lämpötilarajakytkin
- Temperatur gränsbrytare
- Temperatur Endschalter


220RXT	280RXT
available	available



**Spikes for outrigger pads**

- Piikkilevyt tukijalkoihin
- Vinterplattor för stödbenen
- Winterstützen

220RXT	280RXT
available	available

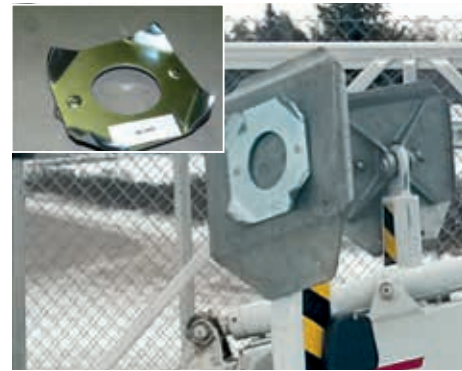

**Fire extinguisher, 6 kg, powder, incl. a storage box in the frame member.**

- Jauhuesammutin, 6 kg, sis. säilytyslaatikon asennetuna nostimen alustaan
- En 6 kilos brandsläckare av pulvertyp, monterad i en skyddande låda på chassit.
- Feuerlöscher, 6 Kg, Pulver, inkl. Aufbewahrungsbox und Aufnahme

220RXT	280RXT
available	available



**Extra outrigger pads and brackets 600 x 600 x 25 mm**

- Maalevyt ja telineet 600 x 600 x 25 mm
- Stödbensplattor och förvaringsställning 600 x 600 x 25 mm
- Zusätzliche Stützplatten und Halterung 600 x 600 x 25 mm

220RXT	280RXT
available	available



**LED driving lights\***

- LED-ajovalot\*
- LED körljus\*
- LED Scheinwerfer\*

\* LED lights on each far end of the machine to provide illumination during loading and unloading

220RXT	280RXT
available	available



**LED flashing warning light**

- LED vilkkuva varoitusvalo
- LED blinkande varningsljus
- LED Kennblitzleuchte

220RXT	280RXT
available	available



**LED flashing warning light on each outrigger with protective cover**

- LED vilkkuva varoitusvalo tukijaloissa suojakatteella
- LED blinkande varningsljus på varje stödben med lågt skydd
- LED Kennblitzleuchte auf jeder Stütze mit Schutzabdeckung

220RXT	280RXT
available	available



**Special color (RAL color map)\***

- Erikoisväri (RAL-värikartta)\*
- Specialfärg (RAL-färgkarta)\*
- Sonderfarbe (RAL-Farbpalette)\*

\* Contact us for details

220RXT	280RXT
available	available





**Wheel chocks 4 pcs + brackets, mounted on the vehicle frame**

- Rengaskiilat 4 kpl + teline asennettuna nostimen alustaan
- Stoppkloss för hjul 4st plus fäste på chassit
- Unterlegkeile, 4 St. mit Halter, an den Fahrzeugrahmen montiert

220RXT	280RXT
available	available

**Ground lead**

- Maadoitusjohdin
- Jordledning
- Erdungsleitung

220RXT	280RXT
available	available

- **Chalwyn valve (ATEX approval)**
- **Spark arrestor (ATEX approval)**
- **Remote battery isolator (ATEX options)**

- Chalwyn-venttiili (ATEX-hyväksyntä)
- Kipinöinnin esto (ATEX-hyväksyntä)
- ATEX-hyväksytty päävirtakatkaisija
- Chalwyn-ventil (ATEX godkännande)
- Ex skyddad motor in och utluft (ATEX godkännande)
- ATEX godkänd huvudströmbrytaren
- Chalwyn-Ventil (ATEX Genehmigung)
- Funkenfänger (ATEX Genehmigung)
- Batteriehauptchalter (ATEX Genehmigung)

220RXT	280RXT
available	available



DINO RXT	220RXT	280RXT
<b>STANDARD EQUIPMENT</b>		
Continuous rotation of the boom	std	std
Basket rotation	std 180°	std 180°
AC socket in the basket x 2	std	std
Proportional controls	std	std
Oscillating axle	std	std
Automatic chassis levelling	std	std
Four wheel drive	std	std
Turf tires	std	std
Arctic kit (block heater, start battery charger)	std	std
USB power outlet in basket	std	std
Air / water line to the basket (max 200bar, 93°C)	std	std
<b>OPTIONS</b>		
<b>Options for enhanced use</b>		
Rough terrain traction tires instead of std tires	available	available
Rough terrain traction tires in addition to std tires, incl. wheels	available	available
Trelleborg AW305 special wide turf tires instead of std tires	available	available
Trelleborg AW305 special wide turf tires in addition to std tires, incl. wheels	available	available
Hydraulic generator 3,5kW	available	available
Electric motor 230 VAC for boom movements only	available	available
Air compressor, 400l / 12bar	available	available
<b>Options for enhanced material handling</b>		
DINO SkyRack, plate & tube rack, max loading 100 kg, 3m²	available	available
<b>Options for basket</b>		
LED working lights	available	available
Rack for tools & accessories (removable)	available	available
12V power outlet in the basket	available	available
DINO Safe Guard, secondary guarding including AV warning	available	available
Anemometer	available	available
Basket load sensor	available	available
NEW! Entry stairs for the basket together with higher boom rest position	available	available
<b>Optional basket configurations</b>		
One person basket (0.7 x 0.8 m) instead of std basket	available	available
One person basket (0.7 x 0.8 m) in addition to std basket	available	available
XL basket for two persons (0,75 x 1,6m) SWL 250kg, instead of std basket, incl. basket load sensor	available	-
<b>Other options</b>		
GPS Telematics device	available	available
Particle filter incl by-pass valve	available	available
Hydraulic oil cooler for hot environment	available	available
Thermometer/ Temperature limit switch	available	available
Spikes for outrigger plates	available	available
NEW! Fire extinguisher, 6 kg, powder, incl. a storage box on the frame member	available	available
Outrigger pads + brackets, 600x600x25 mm	available	available
LED driving lights	available	available
LED flashing warning light on engine cover	available	available
LED flashing warning light on each outrigger with protective cover	available	available
Special colour (RAL color map)	available	available
NEW! Wheel chocks 4 pcs + brackets, mounted on the frame member	available	available
Ground lead, spike type	available	available
Chalwyn valve (ATEX approval)	available	available
Spark arrestor (ATEX approval)	available	available
Remote battery isolator (ATEX options)	available	available