


Options for

# DINO lightweight

Mobile Elevating Work Platforms

## DINO Trailer mounted MEPWs / DINO Articulated

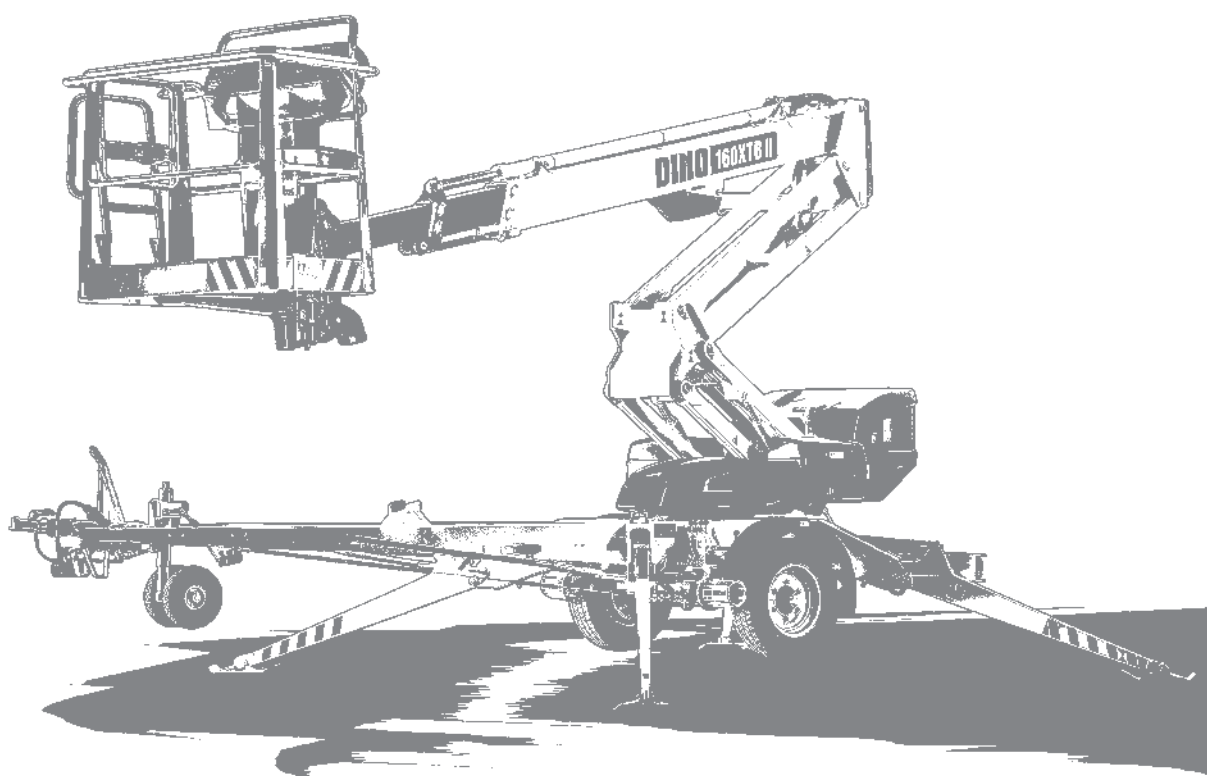

Valid for deliveries 1.1.-31.12.2022

**DINO** XT/B II Series

**DINOlift**

UP TO THE JOB

## STANDARD EQUIPMENT

STANDARD EQUIPMENT	DINO XT II				DINO XT B II		
	160XTII	180XTII	210XTII	260XTD	160XTB II	180XTB II	210XTB II
230V AC-motor	std	std	std	std	-	-	-
24V DC-motor	-	-	-	-	std	std	std
Continuous rotation of the boom	std	std	std	std	std	std	std
Basket rotation	std, 180°	std, 180°	std, 180°	std, 90°	std, 180°	std, 180°	std, 180°
Driving system	std	std	std	std	std	std	std
Remote control for driving	std	std	std	std	std	std	std
AC socket in the basket x 2	std	std	std	std	std	std	std
USB power outlet in basket	std	std	std	std	std	std	std
Nose-wheel	std	std	std	std	std	std	std
Proportional controls	std	std	std	std	std	std	std
Hour meter	std	std	std	std	std	std	std
Activated emergency circuit-LED	std	std	std	std	std	std	std
Easy-entry gate in basket, exchangeable finger protection	std	std	std	std	std	std	std
Stone chip protection tape (for front outriggers)	std	std	std	std	std	std	std

## OPTIONS

### Petrol engine

- Bensinimoottori
- Bensinmotor
- Benzinmotor

DINO XT II				DINO XT B II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	std	std	-	-	-



### Diesel engine

- Dieselmoottori
- Dieselmotor
- Dieselmotor

DINO XT II				DINO XT B II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	option	-	-	-



## 2.2 kW Honda generator + bracket for charging batteries, XT B II-Models (A)\*

- 2.2 kW Honda generaattori + teline akkujen lataamista varten (A)\*
- 2.2 kW Honda generator + ställning för att ladda batterierna (A)\*
- 2.2 kW Honda Generator + Träger für Batterieladung (A)\*

\* (A) Check option matrix on page 8

DINO XT II				DINO XT B II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
-	-	-	-	option	option	option



## 2 joystick controls

- 2 joystickin ohjaus
- Styrning med 2 joystickar
- 2 Joystick Steuerung

DINO XT II				DINO XT B II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	std	option	option	option



## Lockable tool / harness box

- Lukittava työkalulaatikko
- Låsbar verktygslåda
- Zusperrbarer Kasten für Werkzeuge

DINO XT II				DINO XT B II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	option	option	option	option



## Extra outrigger pads plastic / wooden, 500 x 500 x 35 mm + bracket (A)\*

- Muoviset / vaneriset tukijalkalevyt, 500 x 500 x 35 mm + teline (A)\*
- Stödsbenplattor, plast / plywood, 500 x 500 x 35 mm + förvaringsställning (A)\*
- Zusätzliche Stützplatten, Kunststoff / Sperrholz, 500 x 500 x 35 mm + Halterung (A)\*

\* (A) Check option matrix on page 8

DINO XT II				DINO XT B II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
Plastic						
option	option	option	-	option	option	option
Wooden						
option	option	option	-	option	option	option



## GPS Telematics device\*

- GPS seurantalaite\*
- GPS lokalisator\*
- GPS Lokalisierer\*

\* Contact us for alternatives



DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	option	option	option	option

## LED outrigger support indicator

- Tukijalkaledit
- LED stödbensindikator
- LED Stützenüberwachung



DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	std	option	option	option

## Remote control for driving and automatic levelling (B)\*

- Kaapeliohjaus ajolaitteelle & automaattitasaus (B)\*
- Kabelstyrning för drivning & automatisk nivellering (B)\*
- Kabelfernbedienung für Fahrtrieb & automatische Nivellierung (B)\*

\* (B) includes tool/harness box, not possible to retrofit



DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	std	option	option	option

## Remote control for driving & automatic levelling & hydraulic coupling of traction drive on/off (B)\*

- Kaapeliohjaus ajolaitteelle & automaattitasaus & rullien hydraulinen kytkentä (B)\*
- Kabelstyrning för drivning & automatisk nivellering & hydraulisk koppling av drivrullar (B)\*
- Kabelfernbedienung für Fahrtrieb & automatische Nivellierung & hydraulische Kupplung des Fahrtriebs (B)\*

\* (B) includes tool/harness box, not possible to retrofit



DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	std	option	option	option

## Special color

- Erikoisväri
- Specialfärg
- Sonderfarbe

DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	option	option	option	option



## DINO Safe Guard, secondary guarding, including AV warning

- DINO Safe Guard puristumisenestosuojaa AV-hälytyksellä
- DINO Safe Guard klämskydd med larmsignal
- DINO Safe Guard sekundäres Schutzsystem mit Alarmsignal

DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	option	option	option	option



## New! DINO SkyRack – plate & tube rack max loading 100 kg, 3m<sup>2</sup>

- DINO SkyRack – levy- & putkiteline, maks. kuorma 100 kg, 3 m<sup>2</sup>
- DINO SkyRack – skivlyft & rörlyft, max. belastning 100 kg, 3 m<sup>2</sup>
- DINO SkyRack – Platten- & Rohrgestell, max. Belastung 100 kg, 3 m<sup>2</sup>

DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	-	option	option	option



## LED traffic lights

- LED tieliikennevalot
- LED belysning
- LED Fahrzeugbeleuchtung

DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	option	option	option	option



## LED working lights

- LED työvalot
- LED arbetsbelysning
- LED Arbeitslichter

DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	option	option	option	option



## Spare wheel with bracket (A)\*

- Vararengas telineellä (A)\*
- Reservhjul inkl. förvaringsställning (A)\*
- Ersatzrad inkl. Halterung (A)\*

\* (A) Check option matrix on page 8

DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	option	option	option	option
Wheel only						
option	option	option	option	option	option	option



## 12V power outlet in basket

- 12V-liitäntä työkorissa
- 12V-uttag i korgen
- 12V-Ausgang im Korb

DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	option	-	-	-



## Rack for tools & accessories, removable

- Työkaluteline, irrotettava
- Verktygsställning, avtagbar
- Gestell für Werkzeuge, abnehmbar

DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	option	option	option	option



## Towing eyelet


- Vetosilmukka
- Bogserögla
- Abschleppöse

DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	option	option	option	option



## Spikes for outrigger pads

- Piikkilevyt tukijalkoihin
- Vinterplattor för stödbenen
- Winterstützen

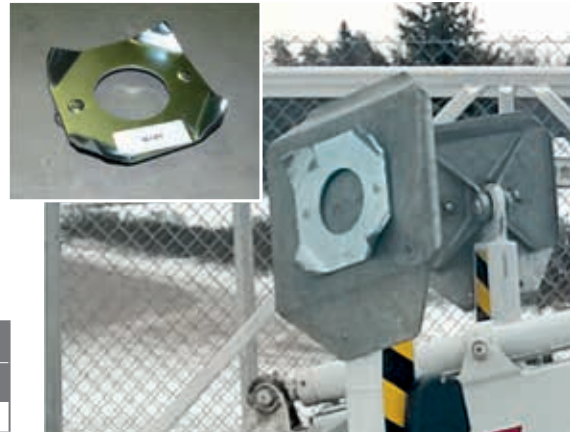

DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	option	option	option	option

## Anemometer

- Tuulimittari
- Vindmätare
- Windmesser



DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	option	option	option	option

## Basket load sensor

- Korikuormananturi
- Lastsensor på korgen
- Korblastsensor



DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	option	option	option	option

## Thermometer / temperature limiter

- Lämpötilarajakytkin
- Temperatur gränsbrytare
- Temperatur Endschalter

DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	option	option	option	option



DINO XT/B II	DINO XT II				DINO XTB II		
	160XTII	180XTII	210XTII	260XTD	160XTB II	180XTB II	210XTB II
<b>STANDARD EQUIPMENT</b>							
230V AC-motor	std	std	std	std	-	-	-
24V DC-motor	-	-	-	-	std	std	std
Continuous rotation of the boom	std	std	std	std	std	std	std
Basket rotation	std, 180°	std, 180°	std, 180°	std, 90°	std, 180°	std, 180°	std, 180°
Driving system	std	std	std	std	std	std	std
AC socket in the basket x 2	std	std	std	std	std	std	std
USB power outlet in basket	std	std	std	std	std	std	std
Nose-wheel	std	std	std	std	std	std	std
Proportional controls	std	std	std	std	std	std	std
Hour meter	std	std	std	std	std	std	std
Activated emergency circuit-LED	std	std	std	std	std	std	std
Easy-entry gate in basket, exchangeable finger protection	std	std	std	std	std	std	std
Stone chip protection tape (for front outriggers)	std	std	std	std	std	std	std
<b>OPTIONS</b>							
Petrol engine	option	option	std	std	-	-	-
Diesel engine	option	option	option	option	-	-	-
2.2kW generator +bracket (A)	-	-	-	-	option	option	option
2 joystick controls	option	option	option	std	option	option	option
Lockable tool/harness box	option	option	option	option	option	option	option
Extra outrigger pads + bracket, plastic 500x500x40 (A)	option	option	option	-	option	option	option
Extra outrigger pads + bracket, wooden 500x500x40 (A)	option	option	option	-	option	option	option
GPS Telematics device	option	option	option	option	option	option	option
LED Outrigger support indicator	option	option	option	std	option	option	option
Remote control for driving & automatic levelling (B)	option	option	option	std	option	option	option
Remote control for driving & automatic levelling & hydraulic coupling of traction drive on/off (B)	option	option	option	std	option	option	option
Special colour	option	option	option	option	option	option	option
DINO Safe Guard, secondary guarding, including AV warning	option	option	option	option	option	option	option
New! DINO SkyRack, plate & tube rack, max loading 100kg, 3m <sup>2</sup>	option	option	option	-	option	option	option
LED traffic lights	option	option	option	option	option	option	option
LED working lights	option	option	option	option	option	option	option
Spare wheel with bracket (A)	option	option	option	option	option	option	option
Spare wheel only	option	option	option	option	option	option	option
12V power outlet in basket	option	option	option	option	-	-	-
Rack for tools & accessories	option	option	option	option	option	option	option
Towing eyelet (different models available)	option	option	option	option	option	option	option
Spikes for outrigger plates	option	option	option	option	option	option	option
Anemometer	option	option	option	option	option	option	option
Basket load sensor	option	option	option	option	option	option	option
Thermometer/ temperature limit switch	option	option	option	option	option	option	option

- not available

(A) in case more than one of the (A) marked option in the machine, please contact sales@dinolift.com

(B) includes tool/harness box, not possible to retrofit

Dinolift Oy | Raikkolantie 145 • FI-32210 LOIMAA, FINLAND

Tel: +358 (0)20 1772 400 • E-mail: info@dinolift.com

[www.dinolift.com](http://www.dinolift.com)

Technical specifications are subject to change without prior notice.

©Dinolift Oy | 29.9.2021