



Standard features in all DINO XTC II models

- Compact and narrow; width 4 ft 7 in / 3 ft 10 in
- Extremely stable to drive long tracks;
 low ground pressure low center of gravity
- Strong diesel engine, excellent gradeability 43 % (1)
- Levelling to the max. inclination 16° (2)
- Automatic levelling
- Hydraulic basket rotation 180° (3)
- Easy-entry basket (4)
- Continuous rotation of the boom
- AC sockets in the basket










Options available for all DINO XTC II models:

- User-friendly radio control (5)
- 230/110VAC electric motor
- Non-marking tracks (6)
- DINO SafeGuard secondary guarding
- Special colour (7)
- Narrow basket 2 ft 4 in x 3 ft 7 in
- LED working lights (8)












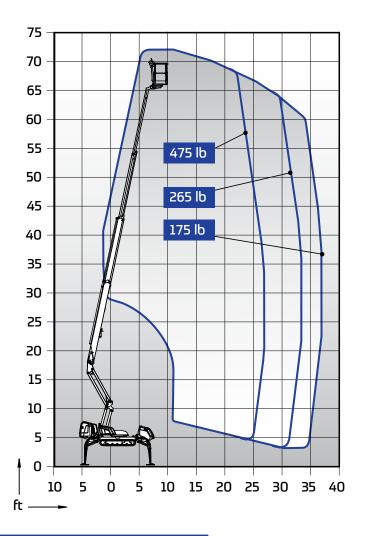

Technical data	
	72XTC II
Max. working height	72 ft 6 in
Max. platform height	65 ft 11 in
Max. outreach	36 ft 1 in
Support width	11 ft 7 in / 12 ft 12 in
Lifting capacity	475 lb
Basket size	2 ft 4 in x 4 ft 3 in
Boom rotation	cont.
Basket rotation	180°
Boom control	proport.
Transport length	20 ft 8 in
Transport width	4 ft 7 in / 3 ft 10 in
Transport height	6 ft 7 in
Weight	6745 lb
AC socket in the basket x 2	std
Diesel engine Kubota 17.3 kW	std
Length of tracks	6 ft 4 in
Gradeability	43 %
Max. levelling inclination	16°
Drive speed	0.9 / 1.5 mph
Automatic levelling	std
Radio control	option
Electric motor 110/230VAC	option



DINO aerial work platforms are known for their quality, reliability and safety.

We design and build every DINO at our factory in Finland.

We take no shortcuts. We make no compromises. We make machines that help you work a t height with maximum confidence. In all conditions. In all terrains.

Get in touch with us to build your own DINO.



For sales reach out to

devonp@raymondbucketguys.com / (603) 303-8364

Office: (603) 895-3803

317 Route 27, Raymond, NH 03077



Dinolift Oy | Raikkolantie 145 • FI-32210 LOIMAA, FINLAND Tel: +358 (0)20 1772 400 • E-mail: info@dinolift.com

www.dinolift.com

Technical specifications are subject to change without prior notice.

©Dinolift Oy | 12.12.2022