

DINO 230VT

DINO® 3.5t VEHICLE-MOUNTED LIFT

Meet

DINO 230VT

Driving to work. Made easier.



DINOLift
UP TO THE JOB

100% up to the job


- Working height 23 m
- 3.5t chassis – drive with a B-class driver's license
- Designed and built rental-proof

Standard features in DINO 230VT

- MyDINO Telematics service integrated
- Cost-efficient in use and easy to drive with a B-class driver's license
- Three jacking options: narrow, wide and one-sided, automatic levelling **(1-2)**
- Easy-entry basket with non-slip stairway **(3)**
- Hydraulic basket rotation 180°
- Up to 3 simultaneous boom movements
- Home and memory functions as standard features
- DINO CAN-BUS control system: intuitive controls **(4)**
- Bumper and cabin protection, auto-detect boom position
- Smooth transitions within the working envelope: operator comfort
- Rental proof: well-protected components
- Remote start/ stop from the basket
- Automatic variable load dependent engine RPM



(1)



(2)



(3)



(4)



(5)

Options available for DINO 230VT


- LED flood working lights in the basket
- 12 V and USB power outlets in the basket
- Outrigger pads and brackets, 400 x 400 mm with a collar, including brackets for transport **(5)**
- LED markers on each outrigger cover
- Tools and harness box in the vehicle frame
- Open top frame cargo area

Technical data

	230VT
Max. working height	23.00 m
Max. platform height	21.00 m
Max. lateral outreach *	15.1 m / 100 kg 11.3 m / 230 kg
Lifting capacity	230 kg
Basket size	0.7 x 1.4 m
Boom rotation	±355°
Basket rotation	180°
Vehicle length *	7.75 m
Max. transport width*	2.43 m
Vehicle width*	2.26 m
Vehicle height *	2.96 m
Total vehicle weight *	3400 kg
Departure angle *	9°
Support width	
- longitudinal	3.9 m
- wide jacking	3.2 m
- narrow jacking	2.0 m
- one-sided jacking	2.6 m
Boom control	CAN-BUS, proportional
Automatic levelling	std
Home function	std
Memory function	std

*) with MB Sprinter chassis

Outreach

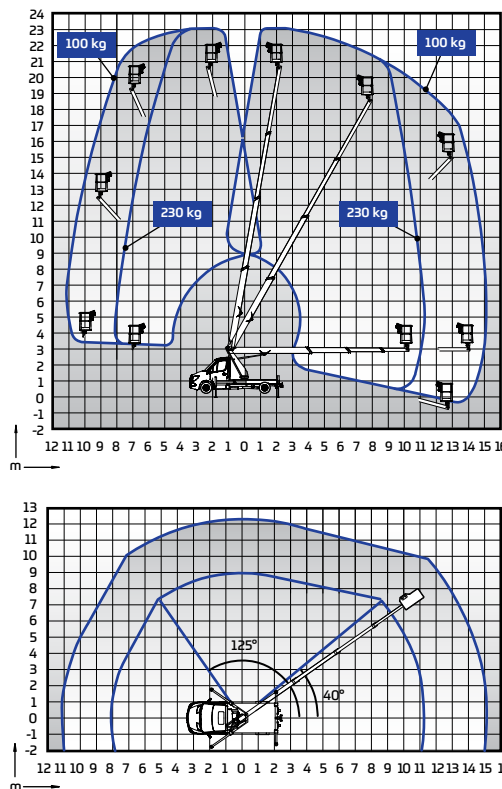

Dinolift Oy | Raikkolantie 145 • FI-32210 LOIMAA, FINLAND

Tel: +358 (0)20 1772 400 • E-mail: info@dinolift.com

www.dinolift.com

Technical specifications are subject to change without prior notice.

©Dinolift Oy | 18.1.2024