

Meet

DINO 220RXT

DINO® Lightweight 4 x 4

Standard features in DINO 220RXT

- Easy-entry basket, fully operational from the basket
- Great rough terrain access: oscillating front axle
- Strong engine, excellent gradeability up to 40%
- 4WD/ 2WS/ 4WS/ Crab steering
- Fast to drive and setup: 9 km/h drive speed in transport position
- Automatic levelling up to 13.5°
- Up to 4 simultaneous boom movements
- Improved user experience, easy to operate and maintain
- Superior boom performance, 8.2 m up-and-over and up to 12 m outreach
- Fly-jib 1.6 m / 140°
- Air / water line to the basket (max 200 bar, 70°C / 100°C)
- MyDINO Telematics integrated


Technical data	220RXT
Max. working height	22.00 m
Max. platform height	20.00 m
Max. outreach	12.00 m
Support width / Footprint	3.90 / 4.40 m
Lifting capacity	230 kg
Basket size	0.70 x 1.30 m
Boom rotation	continuous
Basket rotation	180°
Boom control	CAN-BUS, proport.
Jib	1.60 m / 140°
Transport length	6.36 m
Transport width	2.05 m
Transport height	2.41 m
Weight	4560 kg / 4750 kg*
Approach / departure angles	33.4°
Ground clearance	0.33 m
Four wheel drive	std
Steering, 2WS / 4WS / Crab	std
Power kW (cont./peak)	18.5 kW
AC socket in the basket x 2	std
Automatic levelling	std
Gradeability	40 %
Drive speed	9.0 / 2.4 km/h
Power source, Kubota D1105 EU Stage V, EPA/CARB Tier 4 Final	std

*) option



Options available for DINO 220RXT

- Hydraulic generator 3.5 kW
- Different tyre configurations
- Extra outrigger pads and brackets, 600 x 600 x 30 mm
- DINO SafeGuard secondary guarding
- LED working lights, 2 x 13 W
- LED driving lights
- LED beacons on each outrigger

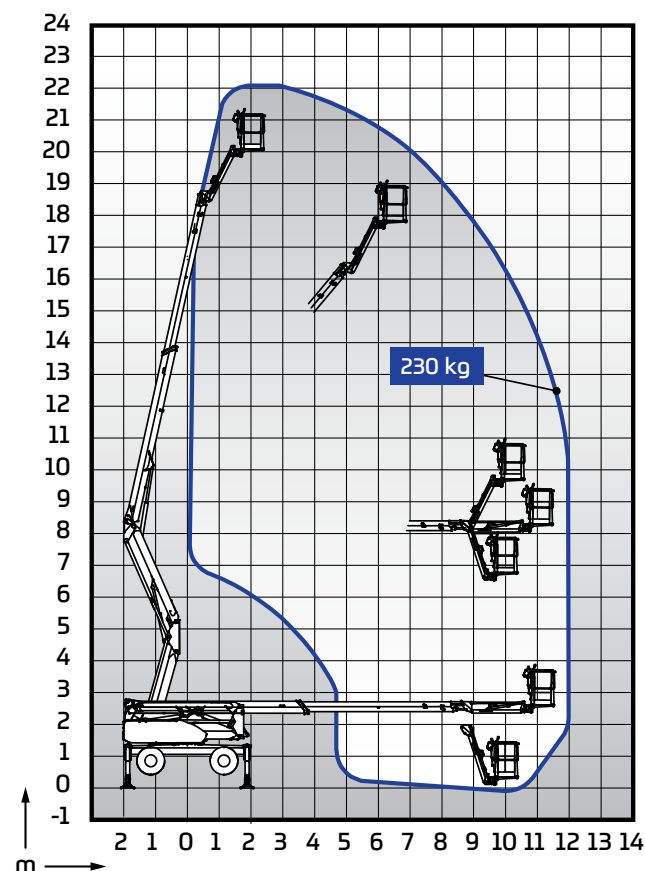

DINOLIFT
UP TO THE JOB

Dinolift Oy | Raikkolantie 145 • FI-32210 LOIMAA, FINLAND

Tel: +358 (0)20 1772 400 • E-mail: info@dinolift.com

www.dinolift.com

Technical specifications are subject to change without prior notice.

©Dinolift Oy | 20.10.2026